

# INSTALLATION INSTRUCTIONS

For Model 73061-246 (Rev. 02/21/2014)

**READ AND SAVE THESE INSTRUCTIONS**

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture, lay out all parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Attach the circular strap (A) to the outlet box using the mounting screws (B) (Size: #8-32N\*L0.5"). The side of the circular strap (A) marked "GND" must face out.
4. Install 2 studs (C) into the circular strap (A), spaced the same distance apart as the holes in back plate (D).
5. Install 1\*40W ST58 bulb (included) in accordance with the fixture's specification. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**
6. Align glass shade (H) to top cover (J).
7. While supporting the glass shade (H), align metal ring (I) onto the bottom of glass shade (H). Secure brackets (F) to top cover (J) and metal ring (I), with cap nuts (G) to secure the glass into place.

## CONNECTING THE WIRES (Fig. 2)

8. At this point, connect the fixture wires to outlet box wires as shown in Fig. 2, making sure that all wire connectors are secured and do not pull off with a slight tug. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap (A) using the green screw provided.

## COMPLETING THE INSTALLATION (Fig. 1)

9. Align back plate (D) onto studs (C) and secure with ball nuts (E).
10. To prevent moisture from entering the outlet box and causing a shortage, use clear caulking (i.e. Indoor/Outdoor silicone sealant) to outline the outside of fixture backplate where it meets the wall leaving a space at the bottom to allow moisture a means to escape (Fig.3).

Your installation is now complete. Return power to the outlet box and test the fixture.

**Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

Fig.1

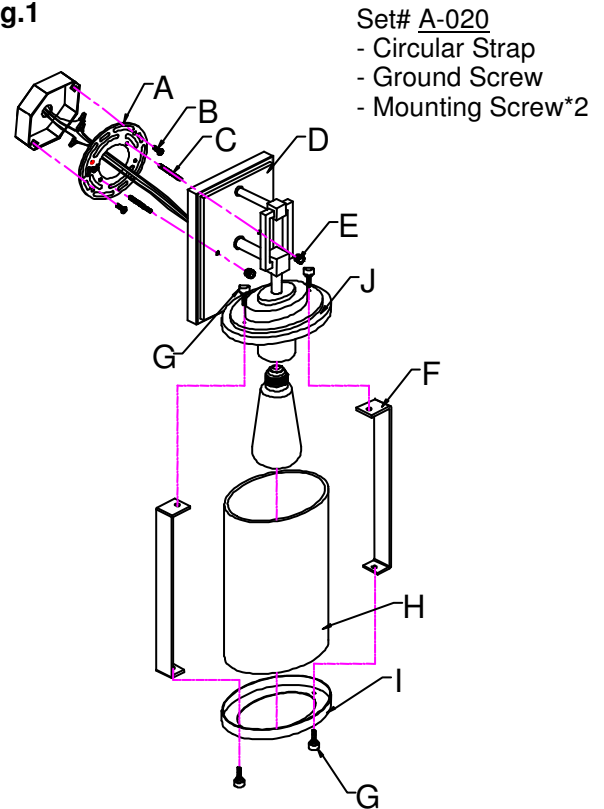


Fig.2

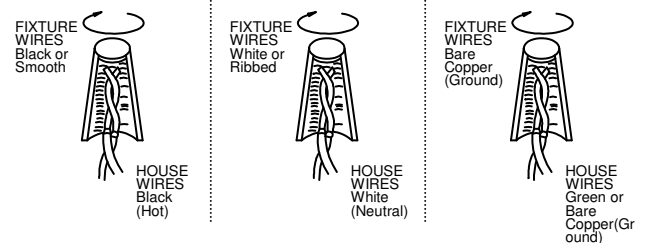


Fig.3

